

MICROMARK^{G3}

The desktop laser marker
precise, solid and compact



LASIT
LASER MARKING INNOVATION

MICROMARK^{G3}

THREE SIDED
OPENING DOOR,
EASY ACCESS TO THE
WORKING AREA

ORIENTABLE
EXHAUST SYSTEM

WORKING TABLE IN HARD
ANODIZED ALLUMINIUM
WITH A STEP DRILLED
MATRIX 50mm

MOTORIZED Z AXIS
WITH INTEGRATED
ENCODER

WIDE WORKING SURFACE
295X590 mm

EASY CONTROL
CONSOLE



ACCESSORIES

- Barcode Reader/Verifier
- Barcode reader interface software with ERP system
- W axis standard resolution 61.440 steps/rev, ø100 chuck without bar pass through arrangement
- Exhaust system with a 3 stages HEPA filter

MicroMark G3 is a compact, functional bench laser marker that is able to meet the most varied production requirements while maintaining relatively low prices. The system is designed to also work with a robot thanks to the electric port: the machine is able to work independently by managing the door opening/closing times through the software.

Furthermore, the structure with opening on three sides simplifies the loading and processing of parts longer than the entire machine.

Included in the system is a PC HP, monitor and both FlyCAD/FlyControl software packages with free upgrades. The marking area from ø140 mm to ø220 mm depending on the lens.

TECHNICAL FEATURES

Working Position	Desktop/Stand Up
Working Table	590x295 mm hard anodized alluminum
Maximum Marking Area	ø140 mm / FFL160 ø220 mm / FFL254
Total Weight	145 kg
Maximum Weight on the Table	40 kg
Maximum Marking Height	200 mm / FFL160 95 mm / FFL254
Door Type	Electric


Laser Type	Fiber Laser
Laser Power	20-30-50 W
Laser Pointer for Preview	With red Light Class I (safe)
Machine Size	Height 835mm Width 710mm Depth 855mm
PC, Monitor and Software	Included, provided by LASIT
Motors Type	Max. 2 with encoder
Power Source	230Vca ±10% 50/60Hz <1000VA

MICROMARK^{G3}

The desktop laser marker totally integrated



OPENINGS ON THREE SIDES

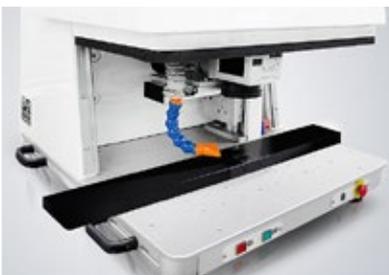

INTEGRATED SYSTEM



MOTORIZED Z AXIS



MicroMark G3 has been developed with a vertical door on three sides so as to guarantee quick and convenient access to the marking compartment. Furthermore, by wearing safety goggles and working with the door open you can also mark large details using a machine that is just slightly larger than a small desk.

On this laser marker, the electrical panel and the laser source are fully integrated into the rear of the machine, avoiding any encumbrance on the work bench. To ensure maximum efficiency, it has an optimal ratio between the size of the work area (590mm) and the external layout (710mm).

Positioning is greatly facilitated thanks to the option of using the Joystick, which becomes an essential tool when combined with the SmartFocus system. This allows the operator to quickly find (on both flat and geometrically complex surfaces with difficult curves or angles) the ideal position for optimal laser marking.



LASIT S.p.A

Sistemi e Tecnologie Elettrottriche S.p.A.
Via Solferino, 4 - 80058 Torre Annunziata (NA)
Ph. 081.536.88.55

www.lasitlaser.com | sales@lasitlaser.com



lasitlaser.com



 [YouTube](#)

LASIT LASER POLSKA

Ul. Fabryczna 43, 43-100 Tychy, Polonia
Tel. +48 327.070.223

www.lasitlaser.pl
biuro@lasitlaser.pl

LASIT LASER IBÉRICA

Calle Bari 55, Plataforma Logística,
50197 Zaragoza, Spain

www.lasitlaser.es
sales@lasitlaser.es